DBI243IB.S.AU

Built-in undercounter dishwasher

General description

Turbo Drying™ - Fan assisted moist air extraction

Product line: Classic

Installation type: Built under work top

Size: XL, 82 cm

Number of baskets: 2

Number of place settings: 14 place settings

Upper rack type: Premium - two foldable wine shelves, fixed pin rows and one foldable glass support

Lower rack type: Premium - foldable pin rows Removable cutlery basket for easy unloading

Construction & Performance

- Welded stainless steel container
- Exterior float
- Stand by water protection
- Anti-block drain pump
- 8 Steel™ construction
- Hidden heater
- SCS+ (Super Cleaning System+)
- Number of spray arms: 2
- Number of spray zones: 7
- Wide Spray A spray zone for pots and pans
- Cutlery Power Zone

Use & Flexibility

- Number of place settings: 14 place settings
- Number of baskets: 2
- Upper rack type: Premium two foldable wine shelves, fixed pin rows and one foldable glass support
- Easy sliding telescope rails with ball bearings for the upper basket
- Lower rack type: Premium foldable pin rows
- Dense basket wiring in both upper and lower basket
- Removable cutlery basket for easy unloading
- Required inlet water pressure: 0,03-1 MPa

Interaction & Control

- Display type: LCD display
- Customizable programs: Program memory
- Number of programs: 7
- Number of options: 5
- Digital countdown indicator: Front Display
- Wash end indication: Visual and sound indication washing end

Programs, options and modes

- 7 programmes: Normal wash; Quick wash; Intensive programme; Eco wash; Hygiene wash; Time program: Rinse and hold
- Delayed start: Variable start delay up to 24 hours
- Speed mode
- Night mode
- Extra dry
- Super rinse

Design & Integration

- From front adjustable rear foot
- Simplified installation with integrated anti-siphon
- Min width: 600 mm
- Min height: 820 mm
- Depth (incl. wall spacing): 560 mm
- Height setting: 50 mm
- Kick plate adjustable depth: 30-94 mm

Safety & Maintenance

- Aqua Safe™
- Kid Safe™ panel
- Rinse-aid indication: Notification in display

Technical data

Max. temperature of inflow water: 70 °C

Applico Limited

Private Bag 92900, Onehunga, Auckland

Phone: 09 574 1050 | Email: info@applico.co.nz | Website: www.applico.co.nz




- Noise level: 44 dB(A)re 1 pW
- Total cycle time of reference program (min): 155 min
- Estimated yearly energy consumption: 275 kWh
- Energy consumption reference program: 0,74 kWh
- Energy stars: 3,5
- Water stars: 4,5
- Water consumption: 12,7 l
- Consumption in off mode: 0,5 W
- Consumption in standby mode: 0,5 W
- Plug type: Australia
- Connection rating: 2000 W
- Number of phases: 1
- Current: 10 amp
- Frequency: 50 Hz
- Required inlet water pressure: 0,03-1 MPa
- Net weight: 39 kg


Dimensions


- Width: 596 mm
- Height: 819 mm
- Depth: 559 mm
- Maximum product height: 869 mm
- Length electrical cord: 1825 mm
- Depth with door open: 1198 mm
- Length inlet hose: 163 cm
- Length outlet hose: 200 cm

Logistic information

- Packaging width: 640 mm
- Packaging height: 890 mm
- Packaging depth: 680 mm
- Gross weight: 42,3 kg
- Product code: 732485
- EAN code: 3838782328022

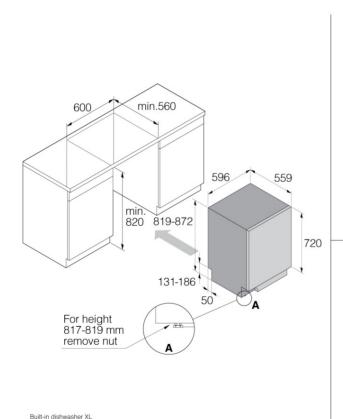





Applico Limited
Private Bag 92900, Onehunga, Auckland
Phone: 09 574 1050 | Email: info@applico.co.nz | Website: www.applico.co.nz

ASKOInspired by Scandinavia