

DBI675IXXLS.U Built-in undercounter dishwasher

General description

Turbo Drying Product line: Style Mode of installation: Built In Size: XXL Number of baskets: 3 Number of place settings: 17 place settings Upper basket type: Exclusive Middle basket: Removable rack for large utensils; Removable rack for bowls, cups and glasses; Handle; Middle basket connection fitted with non-return valve; Guide rails with ball bearings for middle rack Lower basket type: Exclusive Removable cutlery basket for easy unloading



Construction

- . Welded stainless steel container
- Exterior float detects water leakage on the base
- Stand by water protection
- Anti-block drain pump
- . 8 Steel[™] Construction
- . Hidden heater
- . SCS+ - Super Cleaning System+™
- . Sensi Clean™ Sensor - measures dirtiness level
- . Number of spray arms: 2
- Jet Spray[™] Extra dishwashing power for bottles
- Wide Spray[™] A spray zone for pots and pans .
- . Twin Tubes[™] - separate spray zone for the middle basket
- Cutlery Power Zone extra dishwashing power for the cutlery basket .

Use and flexibility

- Number of place settings: 17 place settings
- Number of baskets: 3
- Upper basket type: Exclusive
- Upper basket system: Easy height adjustable with lever •
- Guide rails with ball bearings for upper basket 0
- China Guard protects fragile load from the rotating spray arm 0
 - Middle basket: Removable rack for large utensils; Removable rack for bowls, cups and glasses; Handle; Middle basket connection fitted with non-return valve; Guide rails with ball bearings for middle rack
- Lower basket type: Exclusive
- . Vase and bottle holder .
- Tight mesh base in the baskets
- Removable cutlery basket for easy unloading
- 4 led lights •

0

• Required inlet water pressure: 0,03-1 MPa

Interaction & control

- Display Type: LCD display
- Ability to create own programs: Memory program
- Number of programs: 12
- Number of options: 7
- Status Light™
- Time remaining indicator: Yes
- Cycle end indication: Displayed with sound and light •

Programs

- Delayed start: 1-24 hours
- Green mode
- Speed mode
- Night mode
- Intensive mode
- Extra Dry
- . Normal mode

Design & integration

From front adjustable rear foot



- Trim kit •
- Multi fit outlet hose
- Simplified installation with integrated anti-siphon •
- Depth (incl. wall spacing): 22 5/8" (575 mm) Height setting: 1 15/16" (50 mm) .
- •
- Possible adjustment of kick plate: 1 3/16 3 10/16" (30-94 mm) .

Safety & Maintenance

- . Aqua Safe™
- Kid Safe™ lockable controls
- Rinse-aid indication: Notification in display

Technical data

- Hot or cold water connection 9/16
- Max. temperature of inflow water: 140 F
- Noise level: 40 dB(A)
- Estimated annual energy consumption: 235 kWh
- Energy consumption/cycle: 1 kWh
- Estimated annual water consumption: 687 US Gal •
- Water consumption/cycle: 3 US Gal
- . Consumption in off mode: 0.49 W
- Consumption in standby mode: 0.49 W •
- Connection rating: 1300 W
- Number of phases: 1
- Current: 15 A 0
- Frequency: 60 Hz 0
- Required inlet water pressure: 0,03-1 MPa •
- Net weight: 100 lbs .

Dimensions


- Width: 24" (609 mm)
- Height: 34 5/16" (871 mm)
- Depth: 22 5/8" (574 mm) .
- Maximum product height: 36 1/4" (921 mm) .
- . Cord length: 47 1/4" (1200 mm)
- . Depth with door open: 49 5/16" (1253 mm)
- Length of inflow hose: 64 3/16" (1630 mm)
- . Length of outflow hose: 90 9/16" (2300 mm)

Logistic information

- Packaging width: 25 3/16" (640 mm)
- Packaging height: 36 5/8" (930 mm)
- Packaging depth: 26 3/4" (680 mm)
- Total weight of packaged product: 108 lbs
- Code: 738570
- EAN code: 3838782518423
- Market: Domestic
- Range: Style



Measurements: inches / millimetres

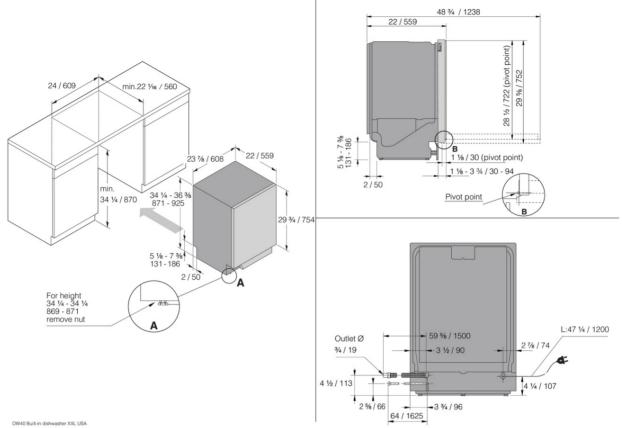

BASKO Inspired by Scandinavia